



Available interface options with FF and IEC14F TrueLock

FF-TL*** or 5/8/FF-TL***	FF-TL*** or 5/8/FF-TL*** With 5/8 CHASSIS	FF-TL*** or 5/8/FF-TL*** With FF CHASSIS	FF-TL*** or PG11/FF-TL***
Standard FF TL connector Without accessory	Standard FF TL connector With accessory	Standard FF TL connector With accessory	Standard FF TL connector With accessory
	99900555 NUT AND WASHER FOR 5/8"	99900550-01 NUT AND WASHER FOR F-81	99570051 5/8FEMALE-PG11MALE ENTRY
	For 5/8 chassis mount Chassis hole app. 16mm	For F chassis mount Chassis hole app. 9,5mm	Converting 5/8 thread to PG11 thread

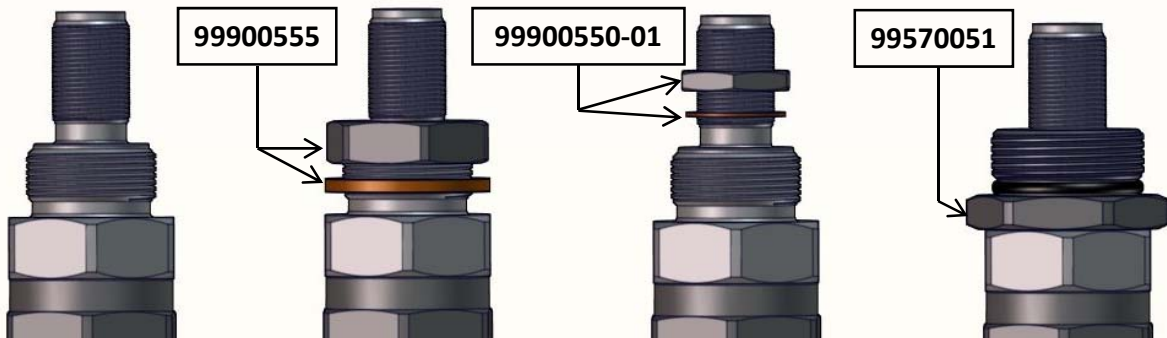

IEC14F-TL*** or PG11/IEC14F-TL***	IECF-TL*** or PG11/IECF-TL*** With PG11 CHASSIS	IECF14-TL*** or PG11/IECF14-TL*** With PG11 CHASSIS	IECF14-TL*** or PG11/IECF14-TL*** With IEC14F CHASSIS
Standard IEC14F TL connector Without accessory	Standard IEC14F TL connector With accessory	Standard IEC14F TL connector With accessory	Standard IEC14F TL connector With accessory
	99900560 NUT AND WASHER FOR PG11	99900560 NUT AND WASHER FOR PG11	99900566 NUT AND WASHER FOR IEC14F
	99456300 M14FEMALE-PG11MALE ENTRY		
	For PG11 chassis mount Chassis hole app. 19mm	For PG11 chassis mount Chassis hole app. 19mm	For M14 chassis mount Chassis hole app. 14mm

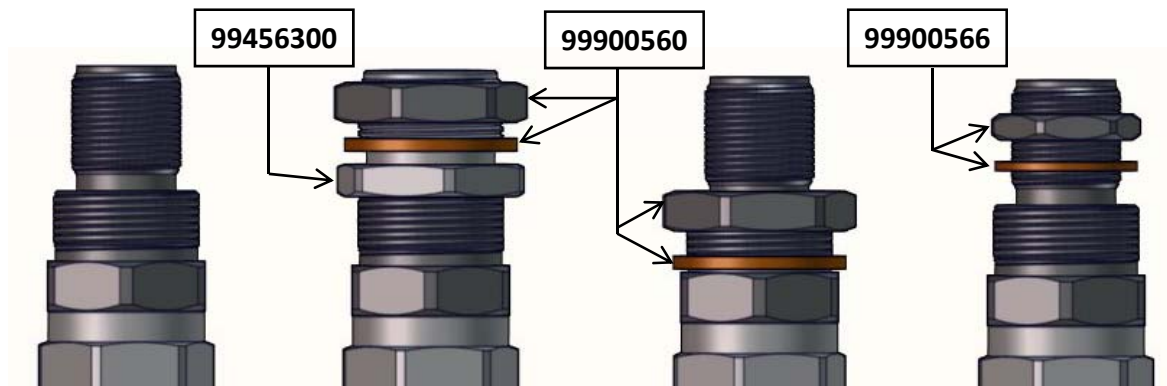

ISO 9001 certified

CORNING

Corning Optical Communications ApS, Industriparken 10, DK-4760

Vordingborg

Tel: +45 55 98 55 99 Fax: +45 55 98 55 04

Rev. Date: 04/12-2014